



FOR LOOPS LAID IN REINFORCED  
CONCRETE CONSTRUCTION

**TYPE S1**

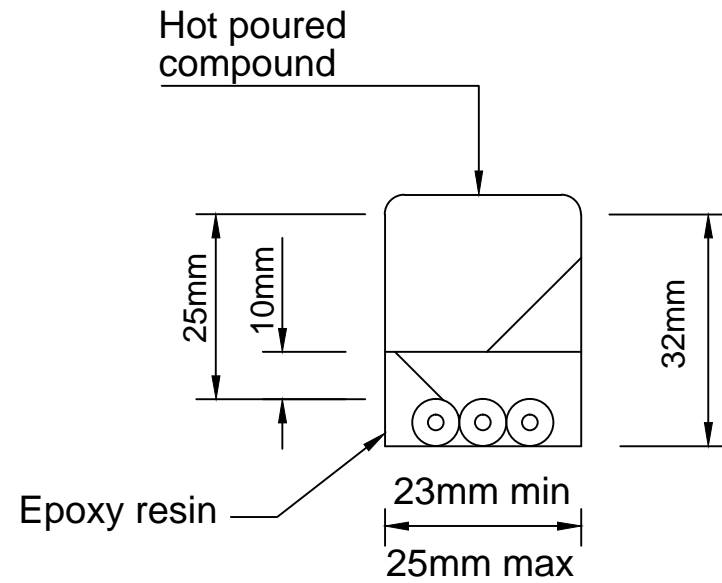


FOR LOOPS LAID IN  
CONCRETE CONSTRUCTION

**TYPE S2**

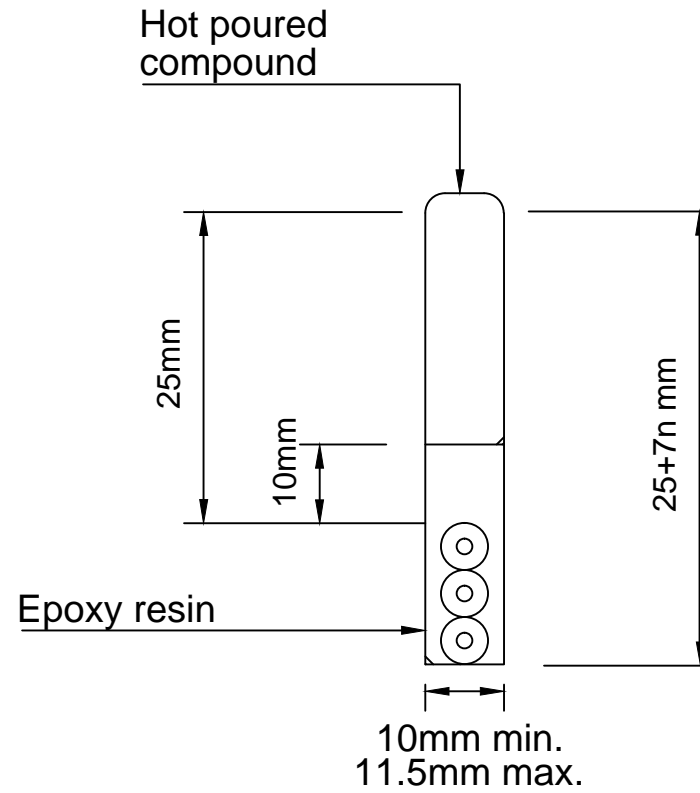

FOR LOOPS LAID IN  
FLEXIBLE CONSTRUCTION

**TYPE S3**

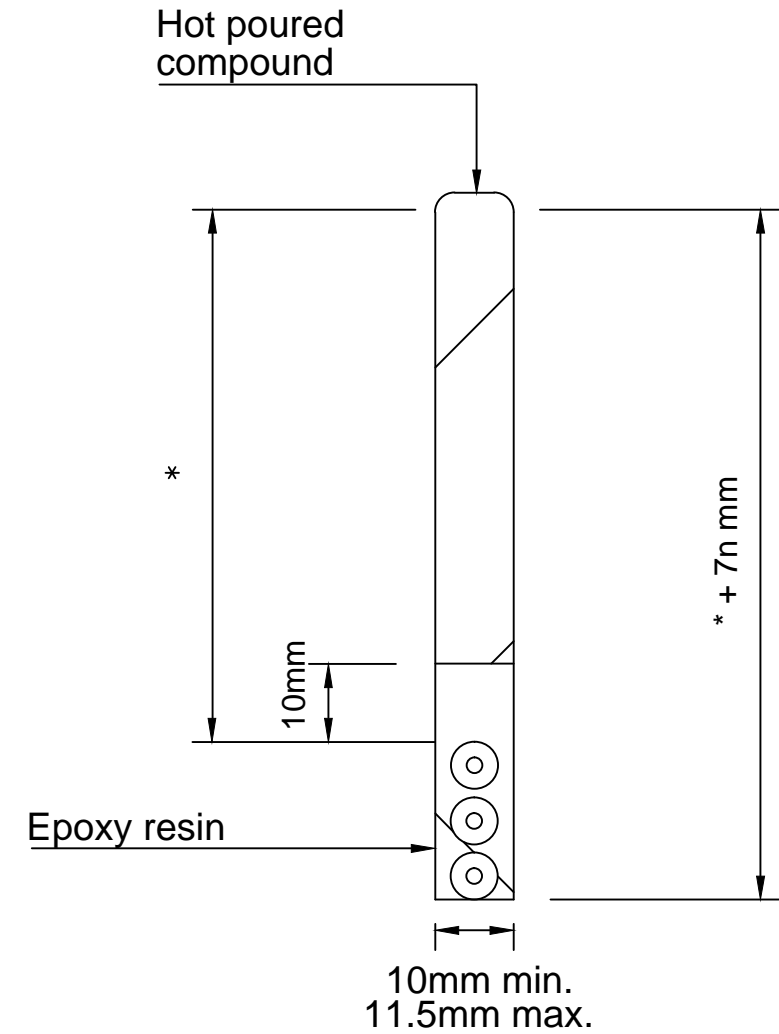

NOTES:

1. Where n = number of cables in the slot.
2. \* unless otherwise specified = 80mm for motorway applications and 65mm for all purpose roads.
3. Hot poured compound shall be oxidised grade bitumen to BS3690 Part 2 Table 3 Grade 85/25 or 85/40.

GCC - STANDARD DRAWINGS

SERIES 1200  
INDUCTANCE LOOP REINSTATEMENT DETAILS

Rev	By	Chkd	Apprd	Date	Description
A	SW	DWM	DWM	10/06/10	MINOR LAYOUT CHANGES

Drawn by:	DWW	Date:	1.2.2017
Checked by:	SW	Date:	1.2.2017
Approved by:	PC	Date:	1.2.2017
Drawing No.	GCC-SD-004		
Drawing Scale:	NTS		

